


Jumper/Connector

Features

- Low insertion loss
- High return loss
- Available in 900 μm , 2.0 mm, and 3.0 mm
- Various connector types available

Applications

- Fiber-optic network
- CATV network
- Optical network equipment
- Data-processing network

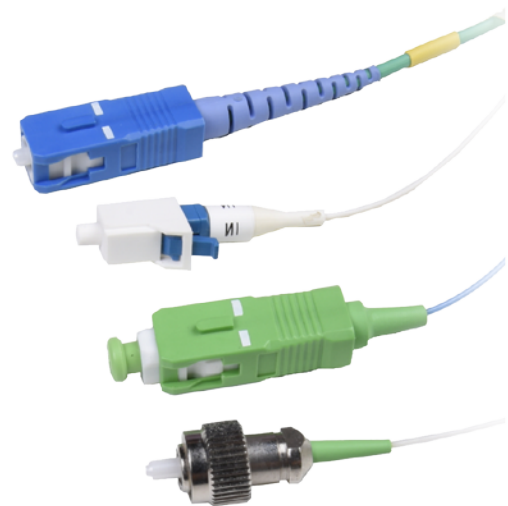

Main Specifications

Parameters		Min	Typical	Max	Unit
Type		LC,FC,SC,MU,ST Connector			
Insertion Loss	Single-Mode			0.25	dB
	Multi-Mode			0.3	
Return Loss	Single-Mode UPC Type	50			dB
	Single-Mode APC Type	60			
	Multi-Mode	35			
Durability	500 Matings	<0.2dB change			dB
Operating Temperature		-20		70	°C
Fiber Type	Single-Mode	SMF-28			
	Multi-Mode	50/125 μm			
		62.5/125 μm			

Order Information

The above specifications represent the typical performance of an O-Net connector. Please contact our Sales to discuss your specific requirements.

